



The World Wide Lead Antenn



GPS+ GSM Antenna

GPW-26

Frequency : 800~1250/ 1650~2700/
2400~2500/ 1575.42 MHZ

Gain : 2dBi

Connector: SMA/M

V.S.W.R : <2.0:1

Impedance : 50 ohm

Cable : RG174 x 3 (Optional)

Weight: 750g

Material : ABS Polymer

Polarization: Vertical

Color: Black/ White

Mounting : Roof Type

Temperature : -30°C to +80°C

Dimension: ϕ 106.5 x 84mm




EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.

No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.

Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com




ISO 9001

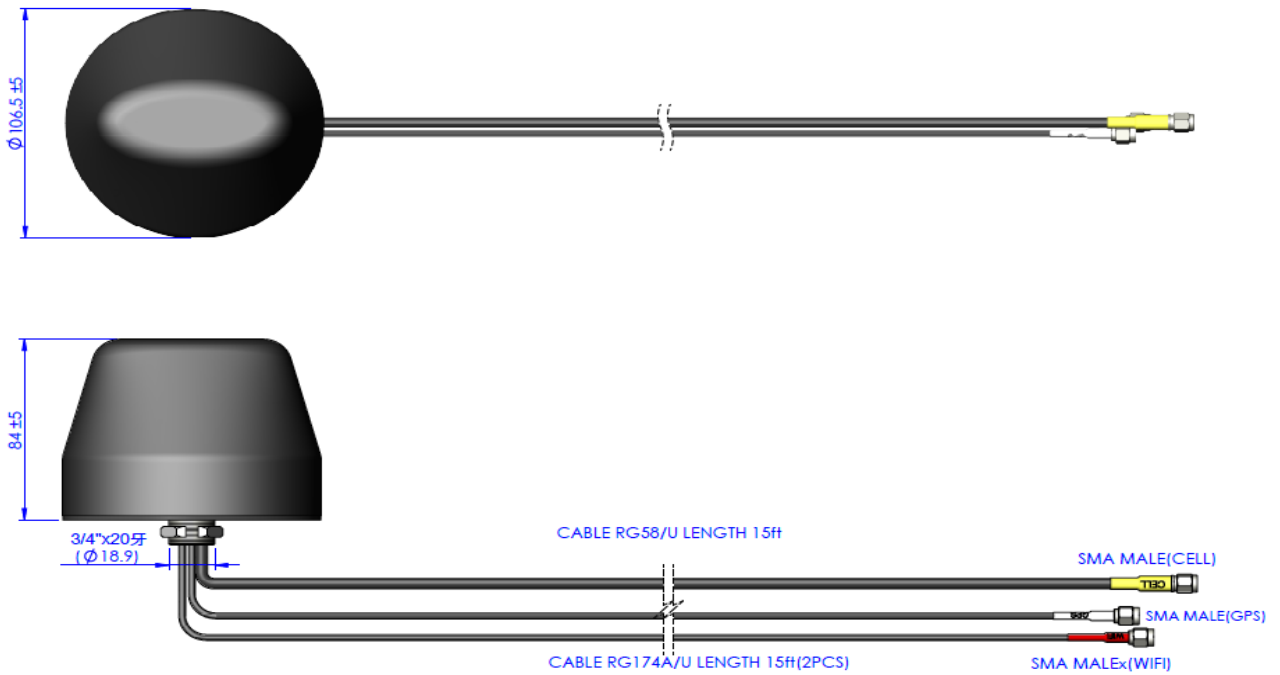

	EVERCOM COMMUNICATION TECHNOLOGY CO; LTD		CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
	MODEL NAME	GPW-26BSM4.5 / SM4.5 / SM4.5			C.H.C 2018.03.27	1:2	mm

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

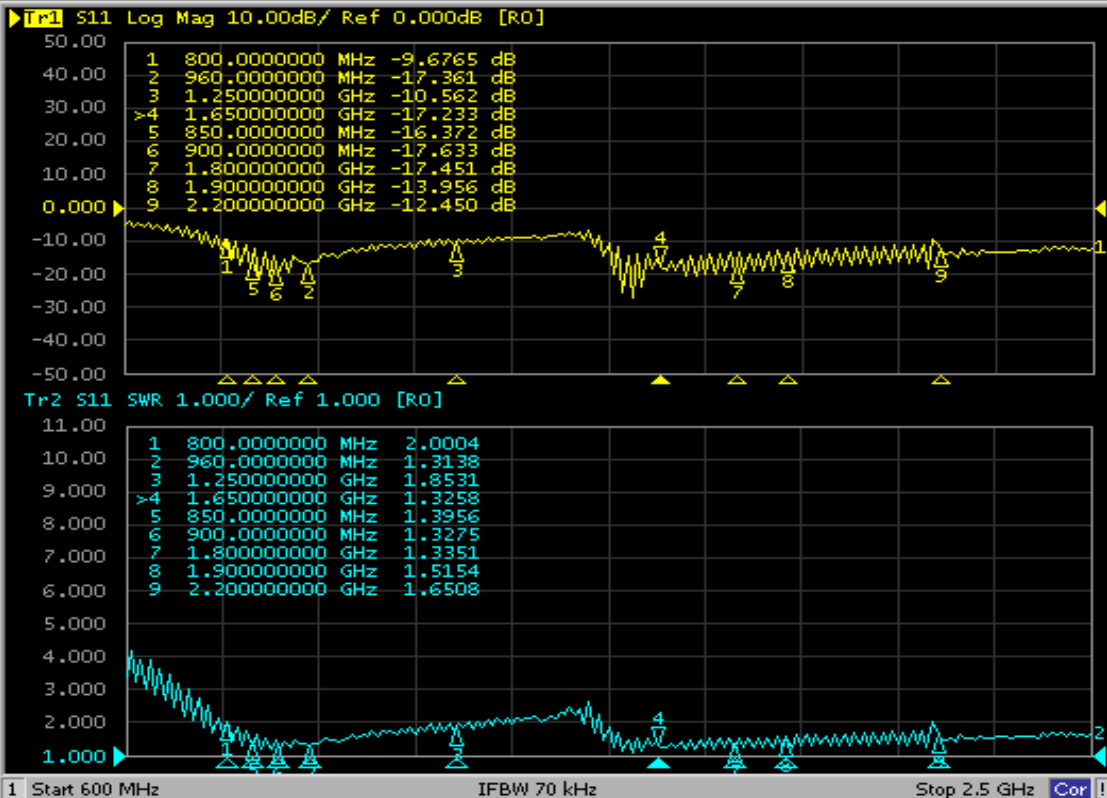

System

Print

Abort Printing

Printer Setup...

Invert Image
ON

Dump Screen Image...


E5091A Setup ▶

Misc Setup ▶

Backlight
ON

Firmware Revision

Meas Stop ExtRef Ready Svc 2020-10-19 08:53

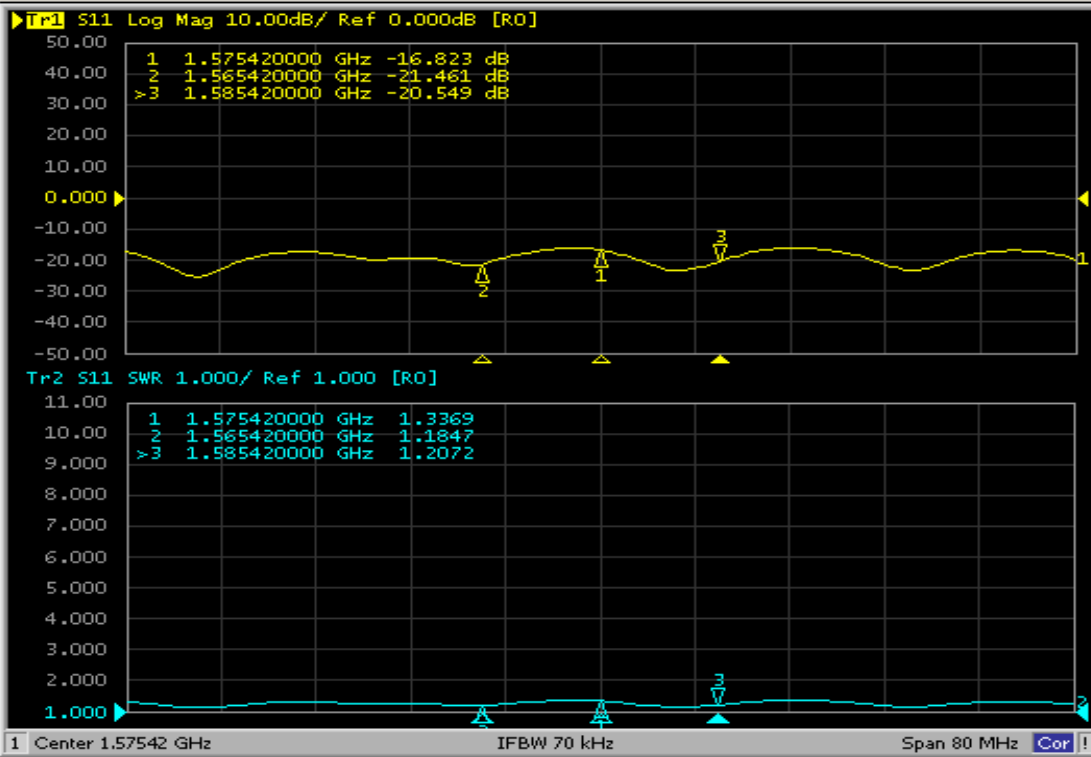

System

Print

Abort Printing

Printer Setup...

Invert Image
ON


Dump Screen Image...

E5091A Setup ▶

Misc Setup ▶

Backlight
ON

Firmware Revision

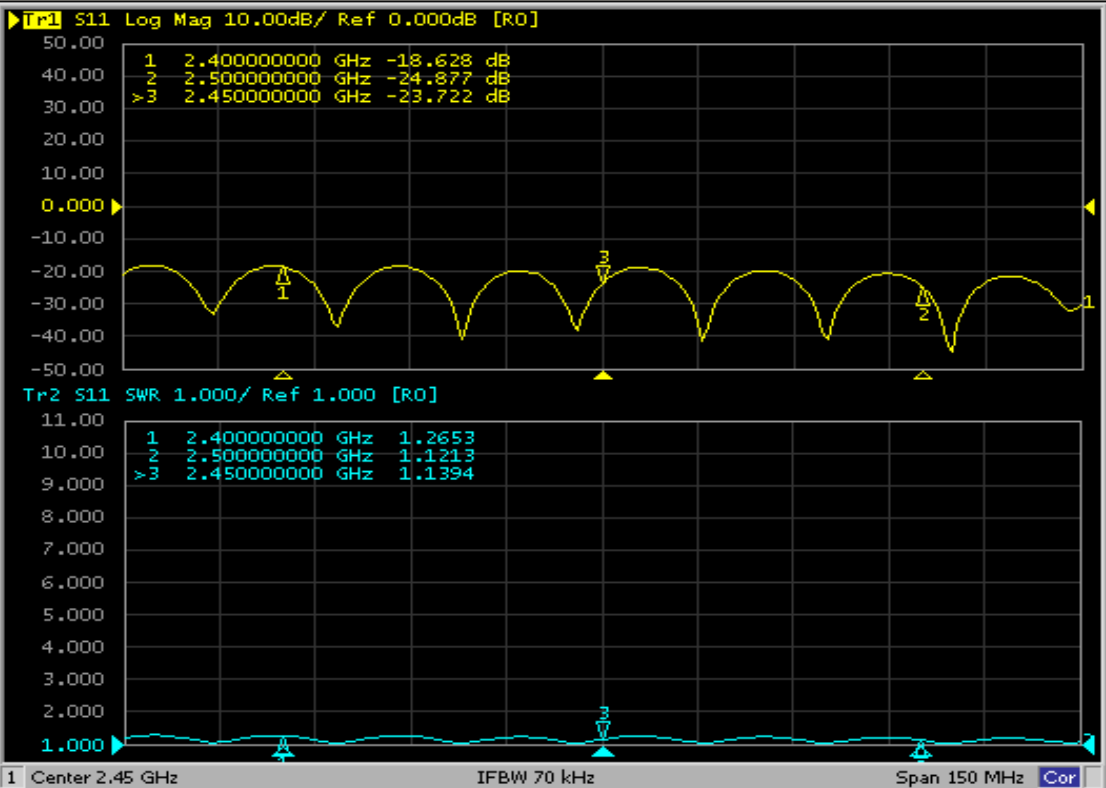

System

Print

Abort Printing

Printer Setup...

Invert Image
ON

Dump Screen Image...

E5091A Setup ▶

Misc Setup ▶

Backlight
ON

Firmware Revision



The World Wide Leader in Antenna

Packaging

***1 pc Antenna
PE bag/ each**



**20 pcs per carton
Carton Dimensions:50*40*30cm**

