



The World Wide Leader in Antenna

GSM Antenna

TC-7308N



Frequency : 824-960 / 1800/ 1900 MHZ

Gain : 0dB

V.S.W.R : <1.5:1

Impedance: 50 ohm

Connector : SMA (Optional)

Cable: 1.5M of RG58 (Optional)

Material : Copper, TRP, Steel

Weight: \approx 180g

Color: Black



Polarization: Vertical

Temperature:-20°C to +60°C

EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.

No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.

Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com

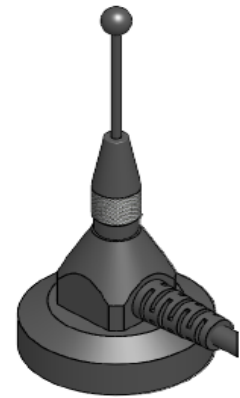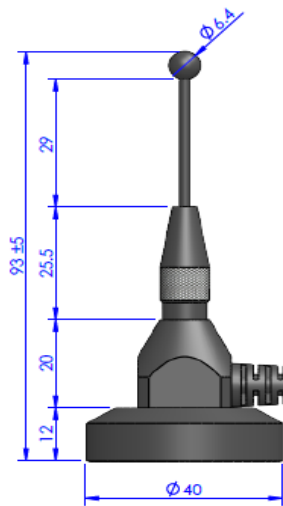

CABLE RG58/U LENGTH 1.5M(5ft)

SMA MALE




EVERCOM COMMUNICATION TECHNOLOGY CO; LTD			CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
MODEL NAME	MODEL NO.	TC-7308N / 58SM1.5			C.H.C	1:1	mm
					2014.12.31		


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Evercom Communication Technology Co.,Ltd.

Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [R0]

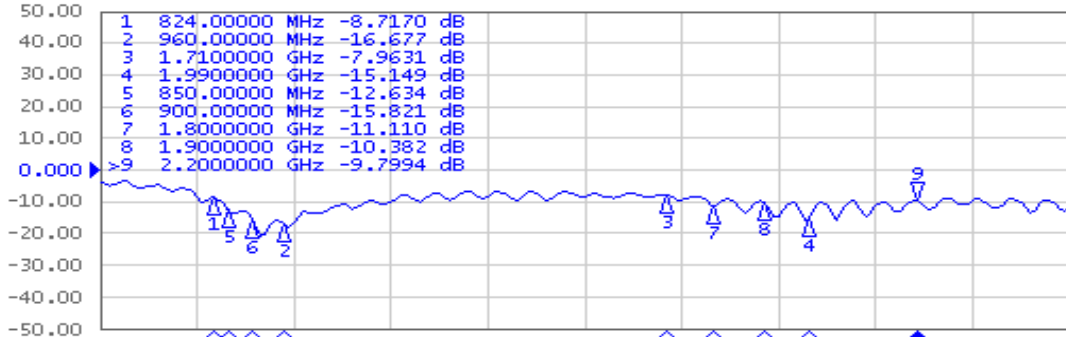

Tr2 S11 SWR 1.000/ Ref 1.000 [R0]

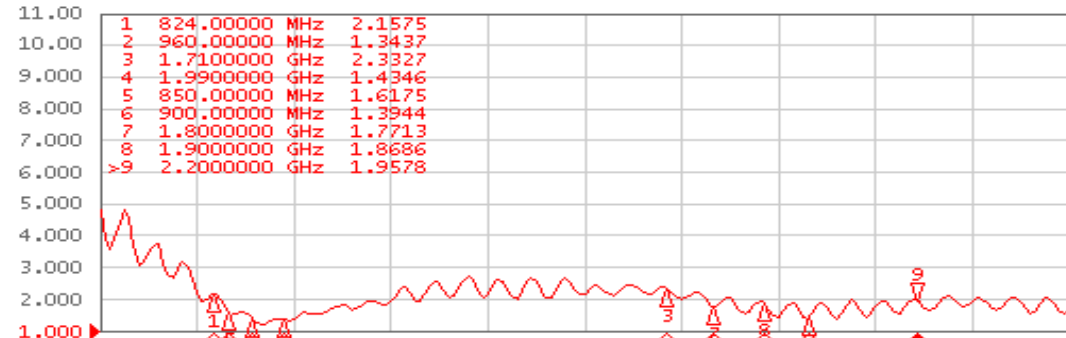

1 Start 600 MHz

IFBW 70 kHz

Stop 2.5 GHz

Cor

Meas Stop ExtRef Ready Svc 2013-09-10 09:05

System

Print

Abort Printing

Printer Setup...

Invert Image
ON

Dump
Screen Image...

Multiport Test Set
Setup

Misc Setup

Backlight
ON

Firmware
Revision



The World Wide Leader in Antenna

Packaging

***1 pc Antenna
PE bag/ each**

**50 pcs per carton
Carton Dimensions:40*30*20cm**

