



SUB 6G Antenna

LTS-TC877



Frequency :617-5925/7125MHZ

Gain : 4dBi

Connector : SMA/M (Optional)

V.S.W.R : <2:1

Impedance : 50 ohm

Cable : RG174 1.5M(Optional)

Weight : 40 g

Material : ABS Polymer

Polarization: Linear (V or H)

Color : Black

Mounting : 3M Tape

Temperature : -20°C to + 60°C


Max. Power: 10W

Dimension: ø103 x 25.5mm

EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.

No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.


Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com

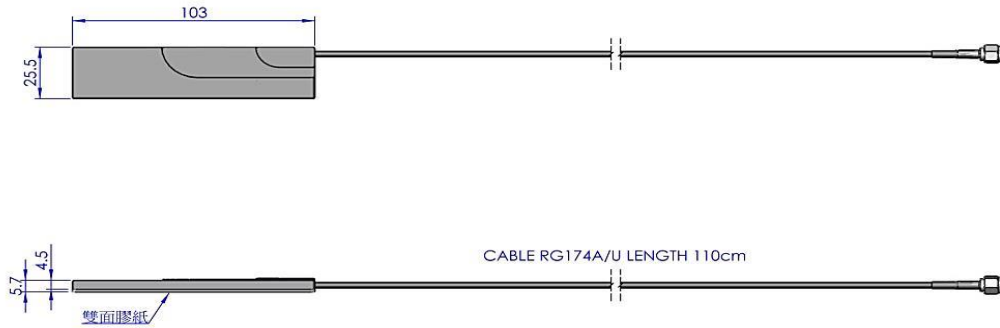

	EVERCOM COMMUNICATION TECHNOLOGY CO.; LTD			CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
	MODEL NAME		MODEL NO.	UMB-TC877SMA-M1		C.H.C	1 : 2	mm
						2016.08.24		

VSWR RG-174/1.5M+SMA/M

2022/1/4 下午 01:26:44

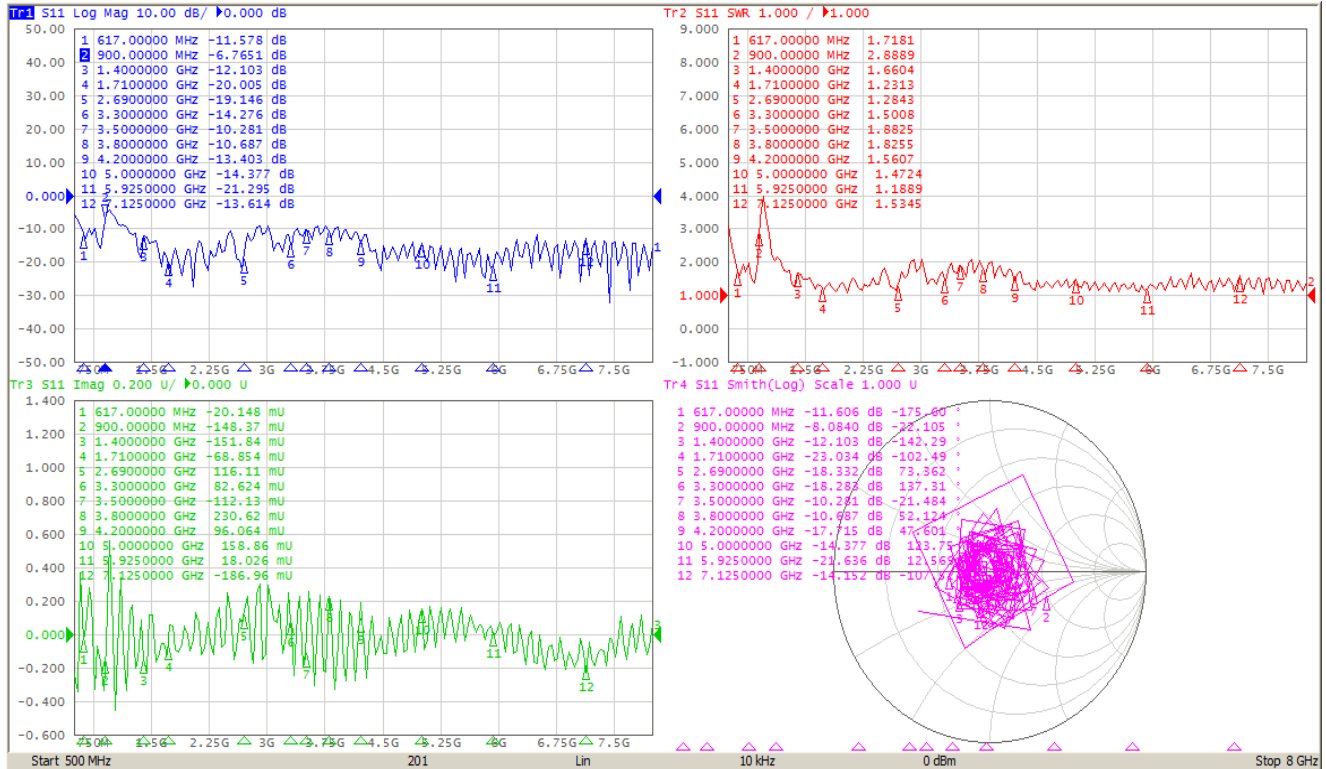



20cm

11cm

20cm

30cm

40cm

***200 pcs Bulk per carton**
Carton Dimensions:40*30*20cm





Antenna Applications

