












The World Wide Leader in Antenna

DVB-T ANTENNA



TV-P888F



Frequency : 470-/860 MHz
Gain : 2 dB
V.S.W.R : <2.0:1
Connector : F/M
Cable : 1.5C-2V
Impedance : 50 Ohms
Material : ABS / SUP
Weight : 120g
Antenna Length : 240 mm
Mount : 3M Tape
Color : Black
Polarization : Linear(H) or (V)
Temperature : -30°C to +60°C

EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.
 No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.
 Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com

DATE	DESCRIPTION	REV
2020.12.24	草稿成品圖	A

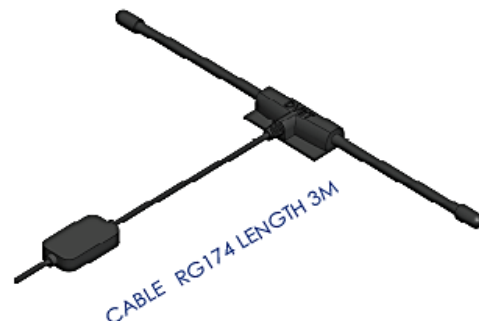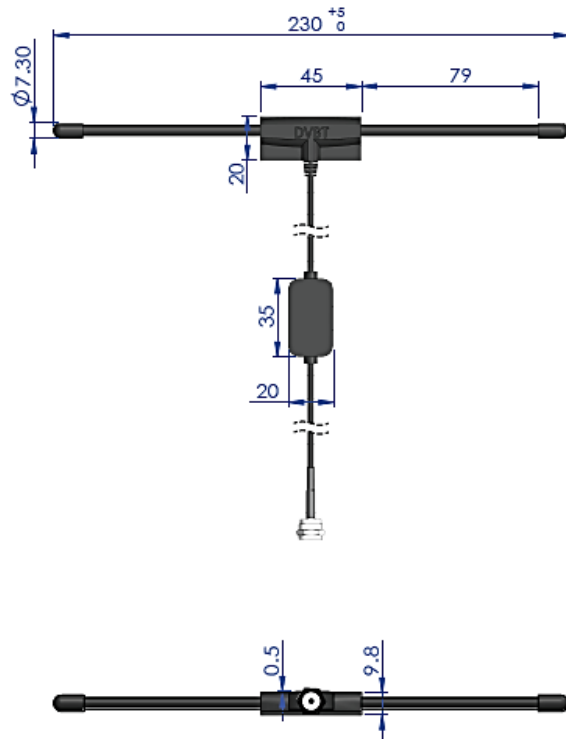

	EVERCOM COMMUNICATION TECHNOLOGY CO.; LTD		CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
	MODEL NO.	RG-TV-P888F-M3-A			Y.W.C 2020.12.24	1:2	mm

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [R0]

1	470.0000000 MHz	-20.384 dB
2	570.0000000 MHz	-17.576 dB
3	690.0000000 MHz	-18.099 dB
>4	860.0000000 MHz	-17.711 dB

Tr2 S11 SWR 1.000/ Ref 1.000 [R0]

1	470.0000000 MHz	1.2170
2	570.0000000 MHz	1.3056
3	690.0000000 MHz	1.2958
>4	860.0000000 MHz	1.3046

1 Start 370 MHz

IFBW 70 kHz

Stop 960 MHz

Cor

Meas

Stop

ExtRef

Ready

Svc

2020-02-24 10:35













The World Wide Leader in Antenna

Packaging

*1 pc Antenna
PE bag/ each

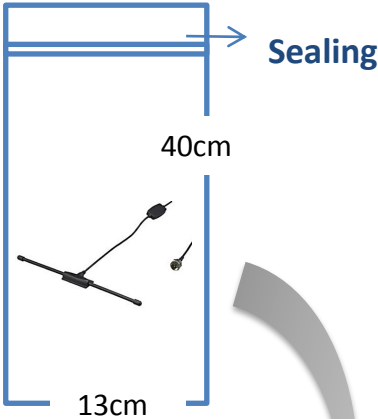

100 pcs per carton
Carton Dimensions:40*30*20cm

