



The World Wide Leader in Antenna

GPS + GSM Antenna

GPM-22



Frequency : 900/1800/1575.42Mhz
Gain : 2.5dBi
Connector: MMCX, MCX, SMA, SMB, BNC, TNC, FME
V.S.W.R : <2.0:1
Impedance : 50 ohm
Cable: RG174 5M x 2
Weight: 200g
Material : ABS Polymer
Polarization: R.H.C.P
Color : Black
Mounting: Roof Type
Temperature: -30°C to +80°C
Dimensions: ø69 x 42mm
Voltage supply 3.3.....5V
Amplification: 27dB
Noise Figure: 1.5dB
Current Consumption: Max. 27mA


EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.

No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.


Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com



ISO 9001

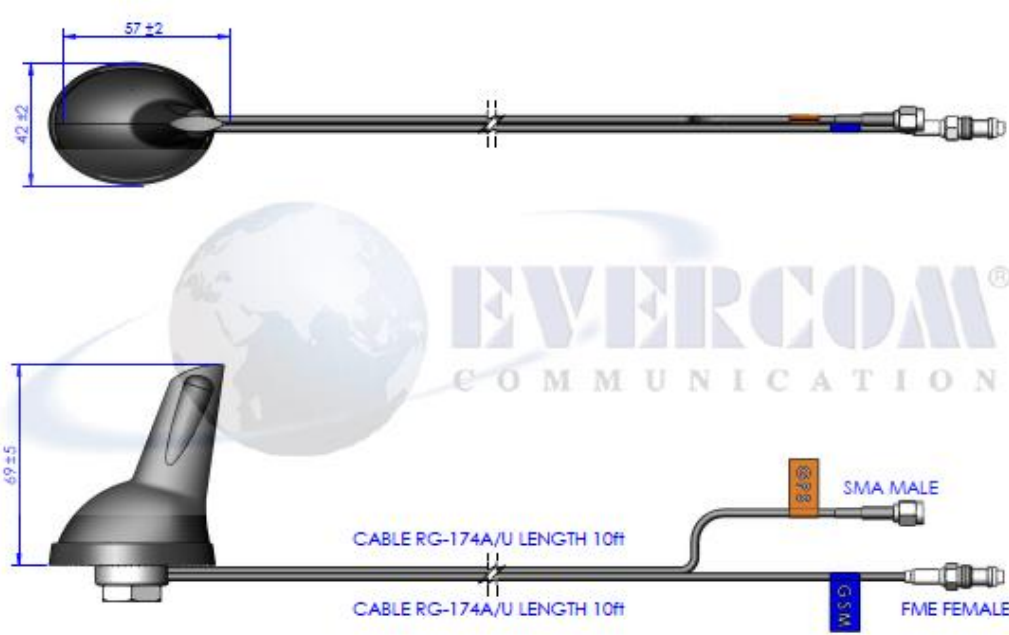


EVERCOM COMMUNICATION TECHNOLOGY CO., LTD				CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
MODEL NAME		MODEL NO.	GPM-22SM3/FF3		<i>Ben</i> 2015.09.22	C.H.C 2015.09.21	1 : 1.5	mm

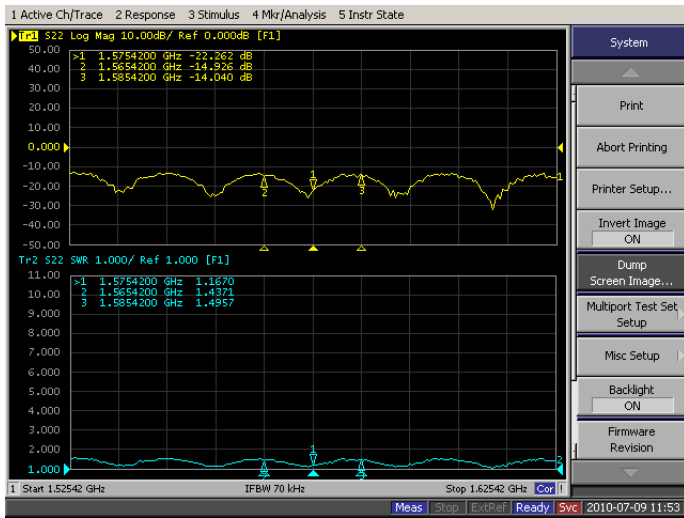

GPS

GSM

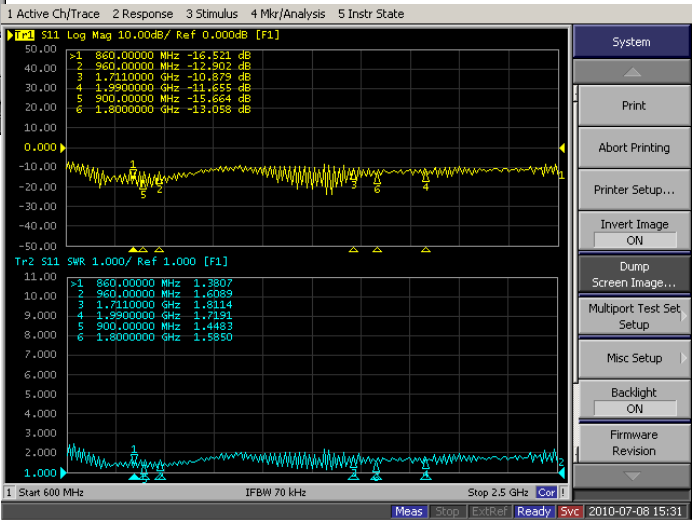



The World Wide Leader in Antenna

Packaging

***1 pc Antenna
PE bag/ each**



**50 pcs per carton
Carton Dimensions:50*40*20cm**

