




The World Wide Leader in Antenna

GSM Antenna

TC-1314

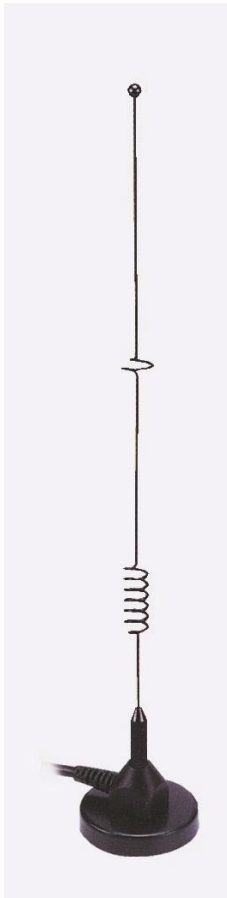

Frequency : 824-960 / 1710-1990/2200MHZ

Gain : 3dB

V.S.W.R : <1.5:1

Impedance : 50 ohm

Connector : FME/F (Optional)

Cable : RG174 3M (Optional)

Length : 301 mm

Material : SUS/ TPR/ Steel

Weight : \approx 200g

Color : Black

Polarization : Vertical

Mounting : Magnet Type

Temperature : -20°C to +60°C

EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.

No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.

Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: service@evercomtech.com




	EVERCOM COMMUNICATION TECHNOLOGY CO, LTD		CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
	MODEL NAME	MODEL NO.	TC-1314EU		C.H.C	1 : 2	mm
					2014.12.17		

Evercom Communication Technology Co., Ltd. Frequency Inspection Report


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Evercom Communication Technology Co.,Ltd.

▶ Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [R0]

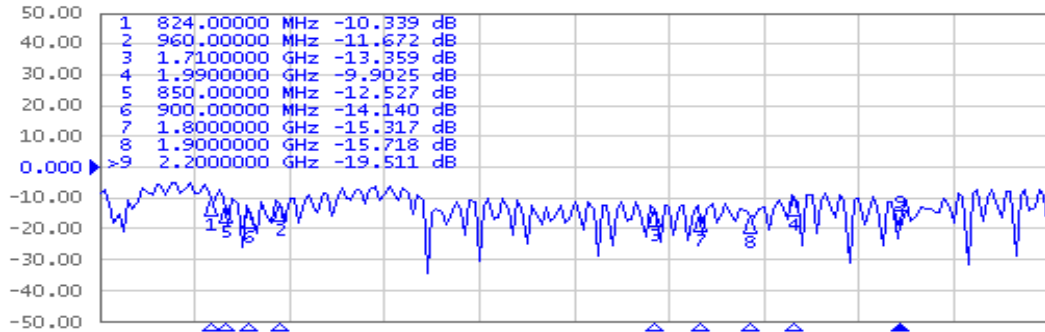

Tr2 S11 SWR 1.000/ Ref 1.000 [R0]

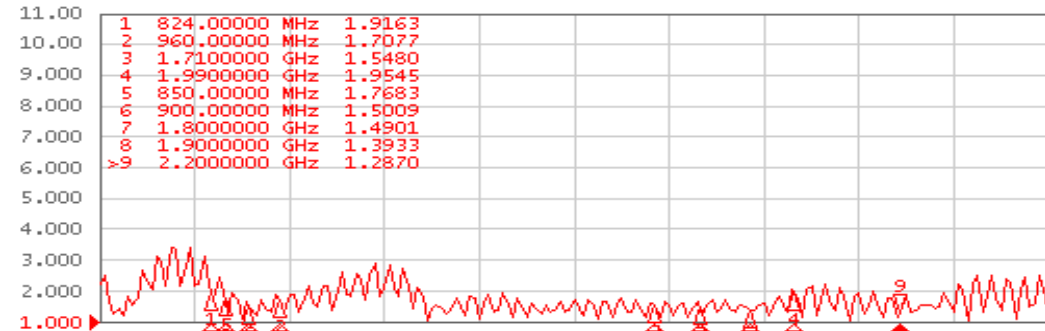

1 Start 600 MHz IFBW 70 kHz Stop 2.5 GHz Cor ! Meas Stop ExtRef Ready Svc 2012-11-13 12:02

System

Print

Abort Printing

Printer Setup...

Invert Image ON

Dump Screen Image...

Multiport Test Set Setup

Misc Setup

Backlight ON

Firmware Revision

Item No. : FG-TC-1314EU

Inspector: Amber



The World Wide Leader in Antenna

Packaging

***1 pc Antenna
PE bag/ each**

**50 pcs per carton
Carton Dimensions:40*30*20cm**

