



The World Wide Lead Antenn



# GSM Antenna

## TC-8817

Frequency : 900/ 1800 MHZ

Gain : 3dBi

V.S.W.R : <1.5:1

Impedance: 50 ohm

Connector :FME/F (Optional)

Cable : RG174 (Optional)

Material : ABS Polymer

Weight: 70g

Color: Black

Polarization: Linear (H) or (V)

Mount: 3M Tape

Temperature:-20°C to +60°C

Max. Power: 25W

Dimension:  $\varnothing$ 37.5 x 8.1mm



EVERCOM COMMUNICAITON TECHNOLOGY CO., LTD.

No.108 Jiesin St. Taoyuan District Taoyuan City 33063, Taiwan R.O.C.

Tel: +886-3- 376- 5678 Fax: +886-3- 376- 5319 E-Mail: [service@evercomtech.com](mailto:service@evercomtech.com)




EVERCOM COMMUNICATION TECHNOLOGY CO., LTD			CHECKED BY	APPROVAL BY	DESIGNED BY	SCALE	UNIT
MODEL NAME	MODEL NO.	TC-8817FME-F4			C.H.C	1 : 1	mm
					2011.06.23		

### Evercom Communication Technology Co., Ltd. Frequency Inspection Report


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Evercom Communication Technology Co.,Ltd.

Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [R0]

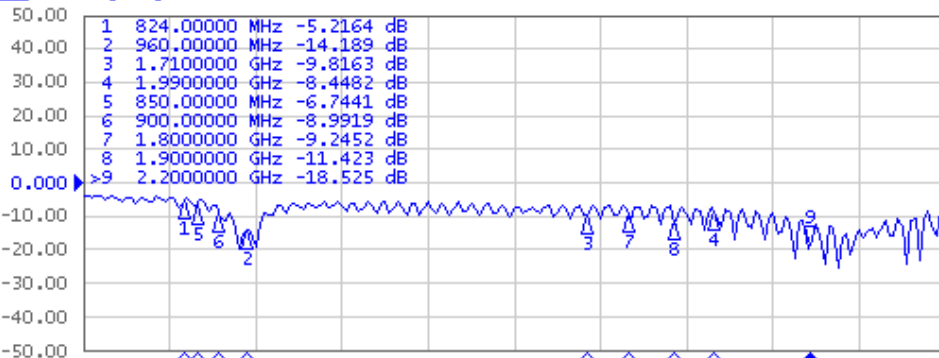

Tr2 S11 SWR 1.000/ Ref 1.000 [R0]

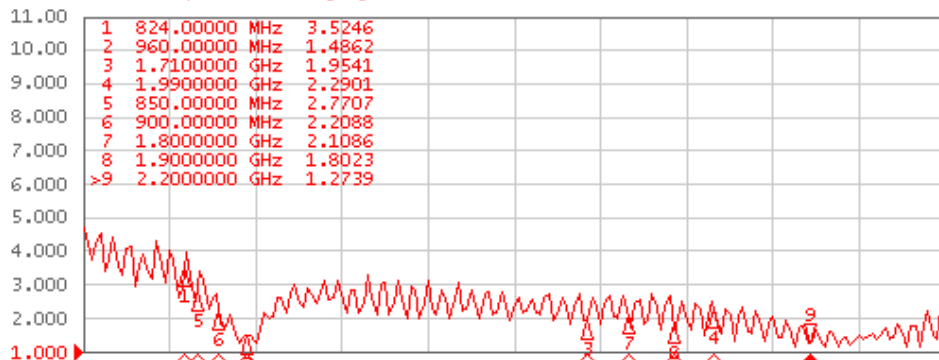

Start 600 MHz IFBW 70 kHz Stop 2.5 GHz Cor

Meas Stop ExtRef Ready Svc 2011-05-04 17:03

Item No. : FG-TC-8817FME-F3

Inspector: Amber



*The World Wide Leader in Antenna*

# Packaging

**\*1 pc Antenna  
PE bag/ each**

**100 pcs per carton  
Carton Dimensions:40\*30\*20cm**

